
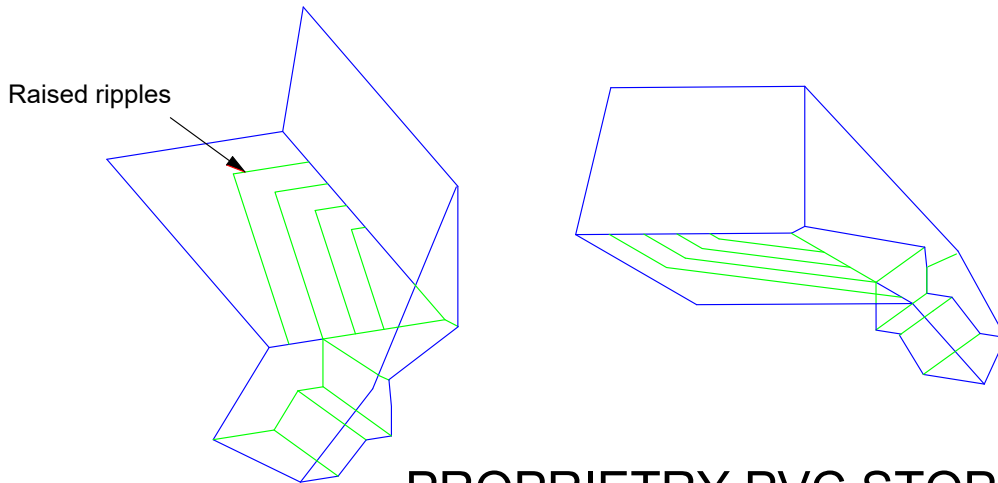


CONSTRUCTION DETAILS FOR 'GAF ASPHALT SHINGLE ROOFING SYSTEM'

Butynol or upstand flashings installed as per manufacturers specs with shingles laid over

1. Provide min 150mm upstand to flashing
2. Provide min 150mm overlap

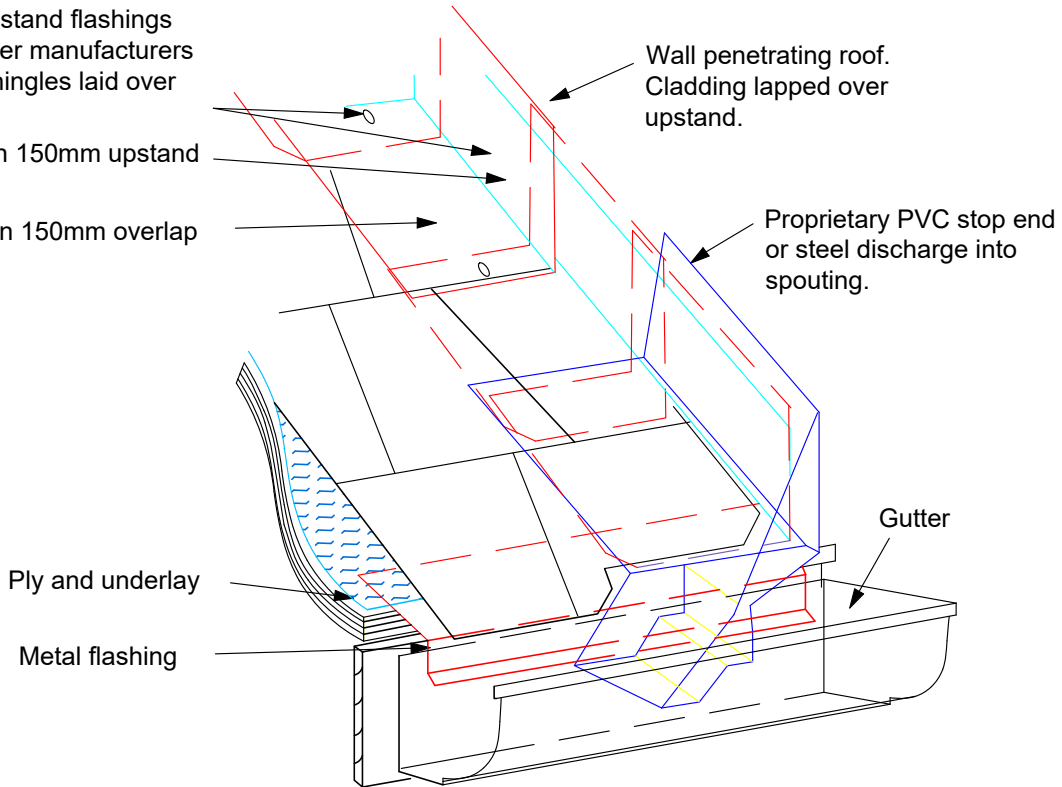

## PROPRIETARY PVC STOP END ONE PIECE FLASHING

	DRAWING: <b>GUTTER WALL JUNCTION</b>	DATE: <b>24 JUNE 2018</b>	DETAIL: <b>11</b>	
	DETAILS FOR: <b>ASPHALT SHINGLE ROOFING</b>	SCALE: <b>N/A</b>		