



Quality You Can Trust...From North America's Largest Roofing Manufacturer!™

Ever Guard TPOSINGLE-PLY BOOFING SYSTEMS

Description

EverGuard® TPO single-ply roofing system accessories provide roofing contractors an easy-to-install, factory-built detail. EverGuard® accessories are constructed from GAF's proven durable EverGuard® TPO single-ply reinforced membrane.


- Cost effective... Reduce installed costs
- Improved reliability...
 Factory-built accessories reduce risk of leaks and callbacks
- Improved aesthetics... Uniform look

Application

EverGuard® TPO Heat-Weldable Cover Tape is constructed from 0.045 inch reinforced TPO membrane; the six-inch-wide tape has a 3-inch self-adhered area and a 3-inch heat-weldable area. The self adhered membrane area is adhered to primed edge metal while the heat-weldable area is attached to the roofing membrane using the welding machine of choice. EverGuard® Heat-Weldable Cover Tape is eligible for inclusion in EverĞuard® Diamond Pledge™ Guarantee at up to 20 years of coverage.

Product Information

EverGuard® TPO Heat-Weldable Cover Tape is packaged as a hundred foot roll with two rolls in every box.

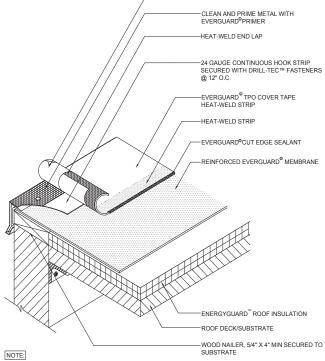

PEEL-N-STICK ADHESIVE

- 1. TPO COVER TAPE ONLY TO BE USED WITH TPO MEMBRANE SYSTEMS.
- 2. CLEAN METAL AND MEMBRANE WITH EVERGUARD® TPO CLEANER AND LET DRY.
 3. PRIME THE METAL ONLY WITH EVERGUARD® TPO PRIMER. DO NOT SPILL PRIMER ON WELDED SEAM AREA.
- 3. PRIME THE METAL ONLY WITH EVERGUARD® TPO PRIMER. DO NOT SPILL PRIMER ON WELDED SEAM AREA. 4. HOT-AIR WELD THE MEMBRANE TO MEMBRANE AREA USING EITHER A ROBOTIC OR HAND WELDER TO SPEC.

Heat-Weldable Cover Tape

Specifications

Roll length: 100' Roll width: 6"

Shipping Specifications

Rolls per carton: 2 Weight of carton: 34 lbs Cartons per pallet: 27

Code Approvals

- UL Listed Accessory
- Miami-Dade County Approved
- Texas Department of Insurance
- ICC-ES
- State of Florida Approved