


COATED METAL DRIP EDGE

Scale: N.T.S.



- NOTES:**
1. FOR HEAT-WELDED LAPS, USE 1-1/2" [38.1 mm] WELD WITH MACHINE AUTOMATIC WELDER AND / OR 2" [50.8 mm] WELD WITH HAND WELDER.
 2. DO NOT OVERLAP ENDS OF FLASHING WITH FLASHING STRIP.
 3. CONTACT GAF FOR APPROPRIATE RECOMMENDATIONS NEEDED FOR ANSI/SPRI/FM4435/ES-1 DESIGN CRITERIA.

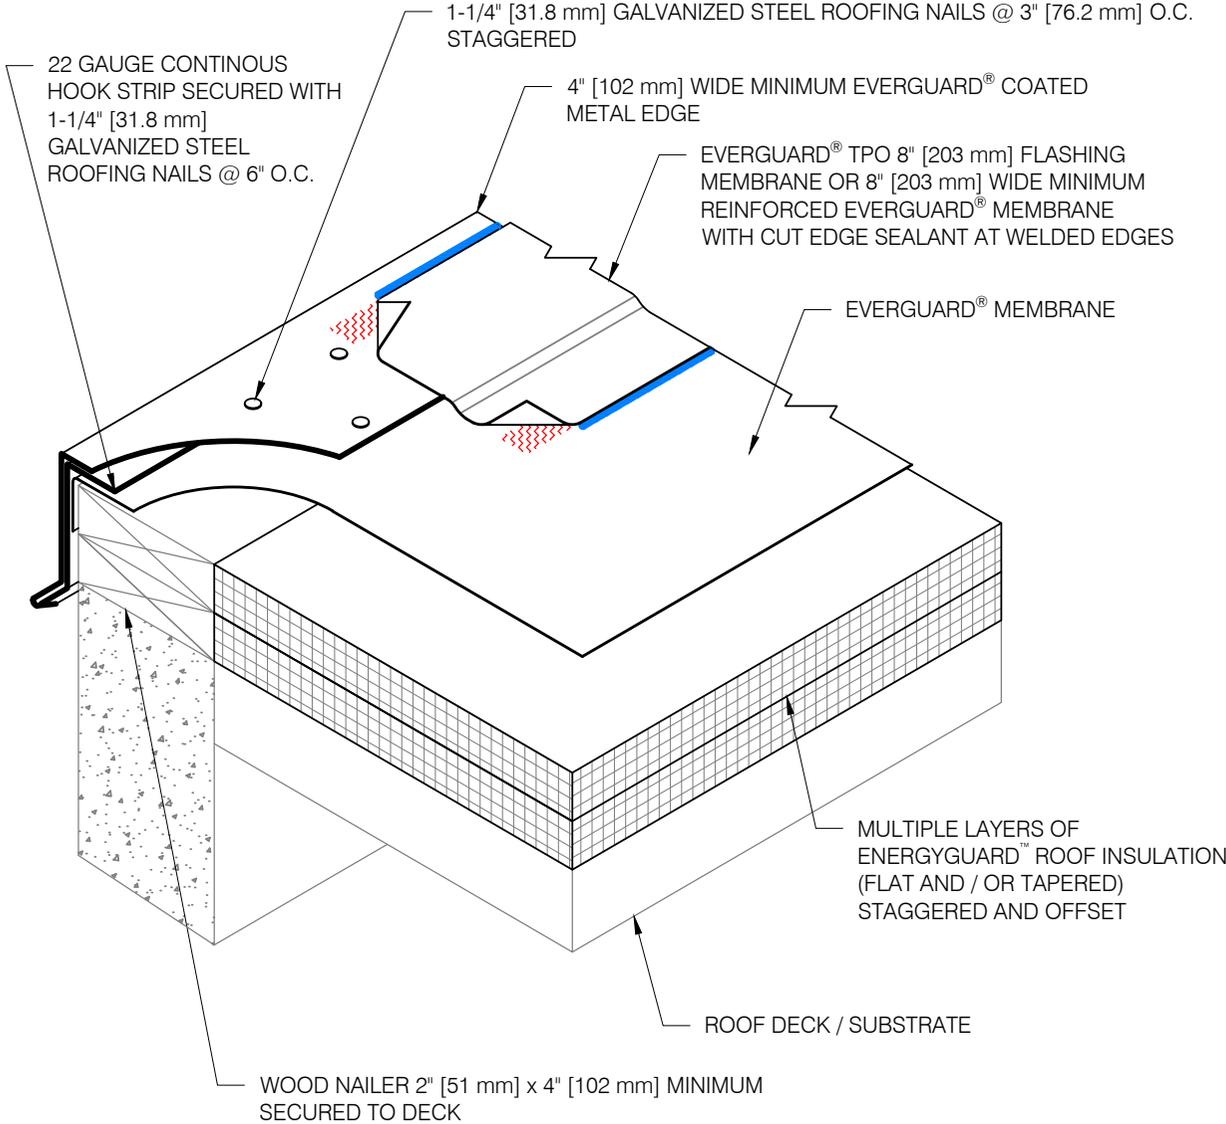

Notes: This detail is in accordance with the BRANZ Appraisal and CodeMark certification. Please contact us for any required customization. © Ultraguard LTD

Technical Support and Advice:
Email: technical@gaf.nz
Call: 0800 42 33 55
Web: www.gafroofing.co.nz/TPO
GAF New Zealand Distributor

Drawing Title: GAF EverGuard TPO Roofing		
REF: T-917	Date: 17/01/2025	Version: A