


WALL FLASHING WITH COUNTER-FLASHING

Scale: N.T.S.

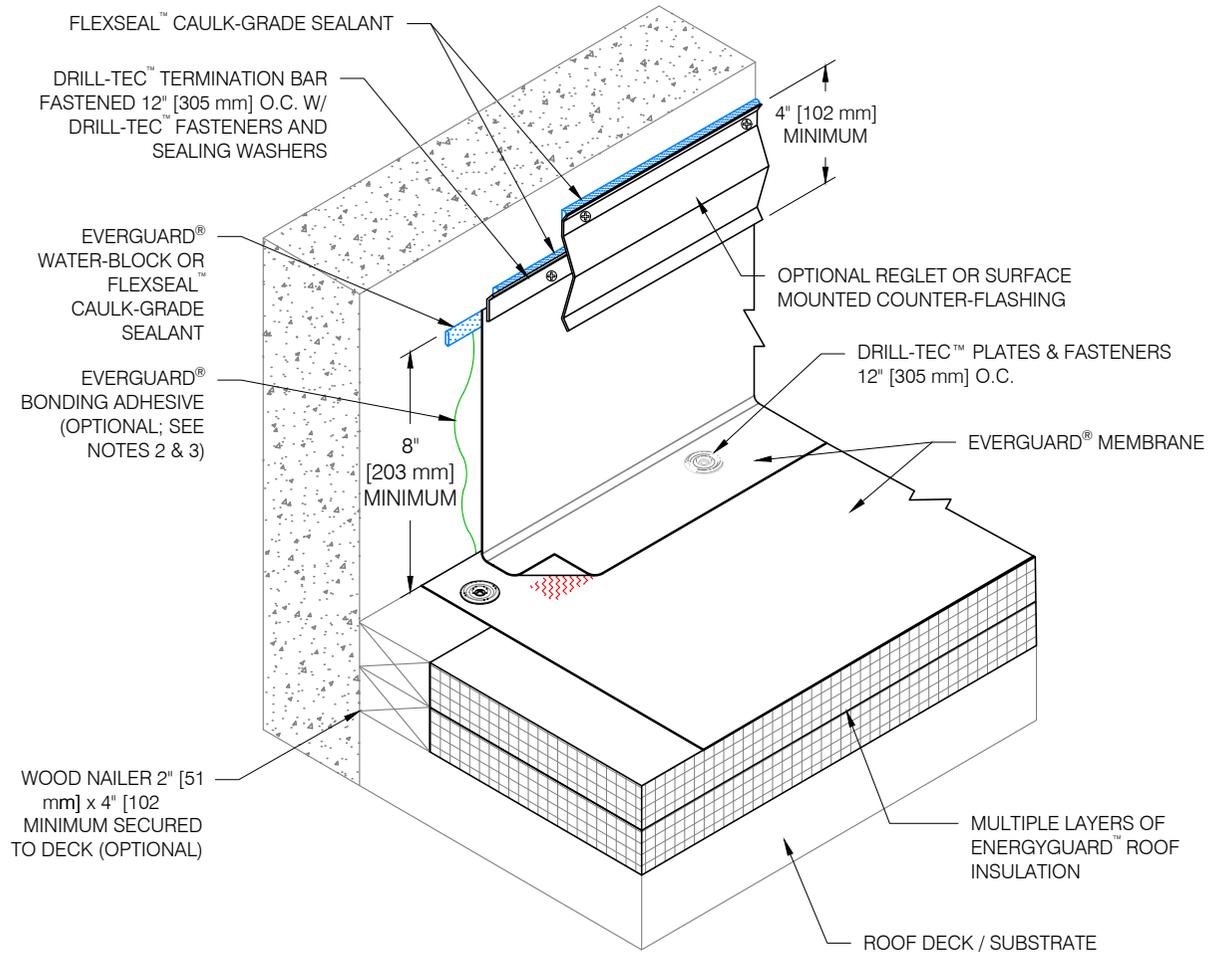

NOTES:

1. EXISTING REGLET IS ACCEPTABLE IF METAL IS IN GOOD CONDITION.
2. IF EVERGUARD® SA MEMBRANE IS USED, BONDING ADHESIVE IS NOT NEEDED AND WALL MUST BE PRIMED.
3. IF EVERGUARD® SMOOTH BACK MEMBRANE IS USED FOR WALL FLASHING, ADHESIVE IS REQUIRED FOR HEIGHTS 30" - 66" [762 mm - 1.68 m].
4. EXPOSED WALLS/CURBS MUST BE WATERPROOFED AND MAINTAINED ABOVE THE BASE FLASHING IN ORDER FOR ANY SURFACE-MOUNTED TERMINATION TO BE EFFECTIVE.



Notes: This detail is in accordance with the BRANZ Appraisal and CodeMark certification. Please contact us for any required customization. © Ultraguard LTD

Technical Support and Advice:
Email: technical@gaf.nz
Call: 0800 42 33 55
Web: www.gafroofing.co.nz/TPO
GAF New Zealand Distributor

Drawing Title:
GAF EverGuard TPO Roofing

REF:
T-919

Date:
17/01/2025

Version:
A